


# EnviroBasin™

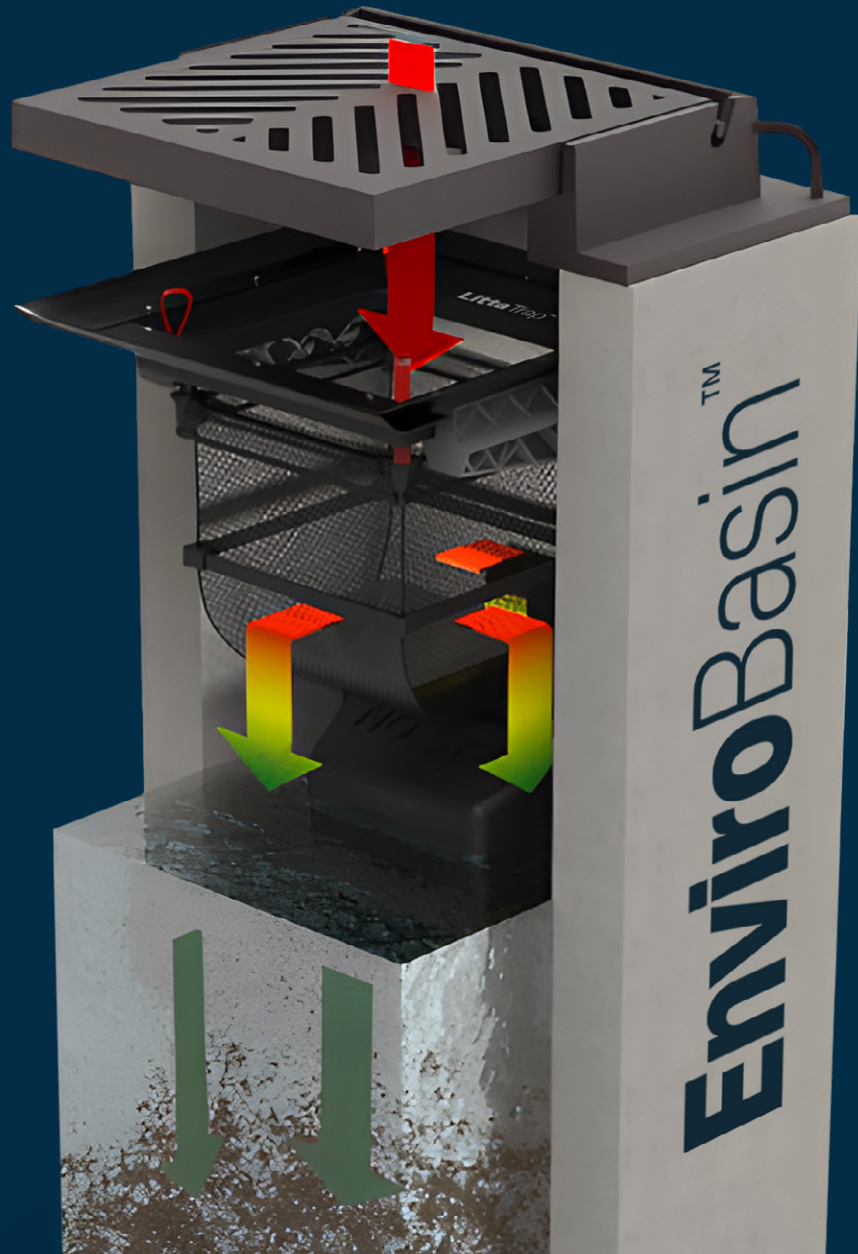

## Technical Guide


# The EnviroBasin™

The EnviroBasin™ is an engineered water quality inlet offering two functions:

1. Conveyance of stormwater runoff from ground level into the reticulation system; and
2. Removal of pollutants and improvement of water quality.

The EnviroBasin™ consists of the LittaTrap™ catch basin insert installed into a pre-cast catch basin to dissipate energy, promote sedimentation and provide full capture of gross solids 5 mm in diameter and greater in stormwater runoff. This is done by the LittaTrap™ device in conjunction with an energy dissipator dish and submerged outlet baffle.

The system is easy and safe to maintain, with large storage capacity relative to its catchment area. Confined space entry is not required.

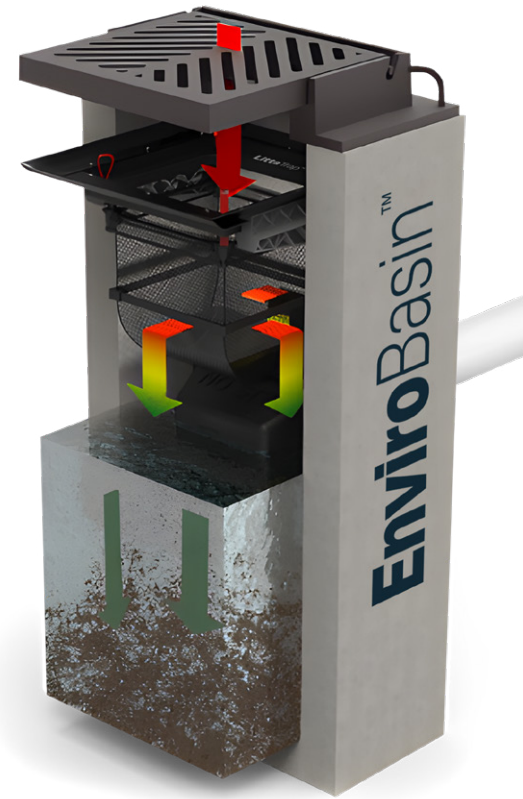


EnviroBasin™ Standard Grate Inlet



## The EnviroBasin™ eliminates the need for downstream oil and grit separators, as it treats the stormwater at the source before it enters the stormwater system.

### FEATURES

- High flow, dry gross solid capture.
- Enhanced nutrient removal.
- Reduced contaminant release.
- Hand maintenance of gross pollutant basket; no vactor truck or confined space entry needed.
- Enhanced energy dissipation and flow distribution.
- >50% ETV PSD sediment removal
- TSS (20–1000 micron) > 80% removal
- Reduced resuspension.
- Large sediment sump storage volume.
- No confined space entry. Vactor truck maintenance frequency of the sump is reduced.
- Lower carbon footprint.

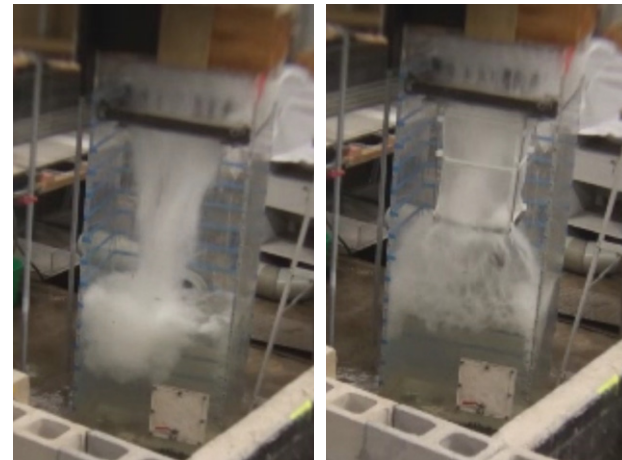

Turbulence in sumped stormwater inlet (left) and EnviroBasin™ (Right)

### TREATABLE CATCHMENT AREA


Each jurisdiction supplies guidance around the hydraulic design, location, and capture capacity of stormwater inlets. Catchment area, gradient, cross fall, configuration, dimensions, and grate all affect the inlet capacity of a catch basin and therefore, the spacing.

The maximum catchment area of the EnviroBasin™ is typically governed by the ability of the peak capture flow of the device, i.e. the inflow for a 5 or 10-year design storm.

EnviroPod in conjunction with AECOM Canada have developed a performance estimating tool to determine the Total Suspended Solids (TSS) removal of the EnviroBasin™ for a given catchment. The performance estimating tool uses third party performance data obtained from Canadian Environmental Technology Verification Program (CETV) procedure for Laboratory Testing of Oil-Grit Separators ISO14034 testing and historical rainfall data to estimate flow, determine surface loading rate and estimate performance for a catchment area.




Field Trials

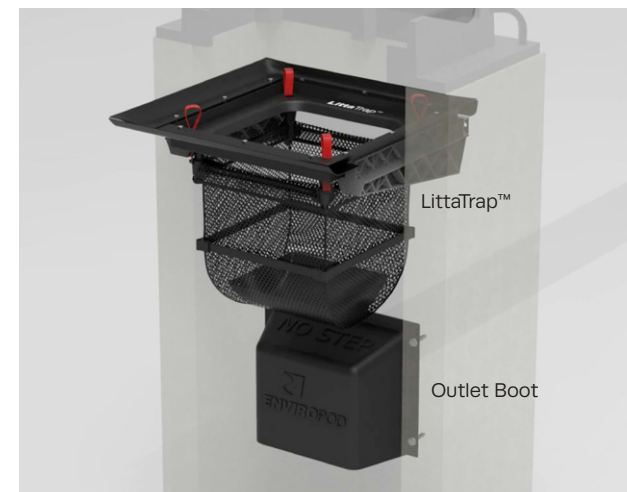

EnviroBasin™ Components

### EnviroPod Construction Liner

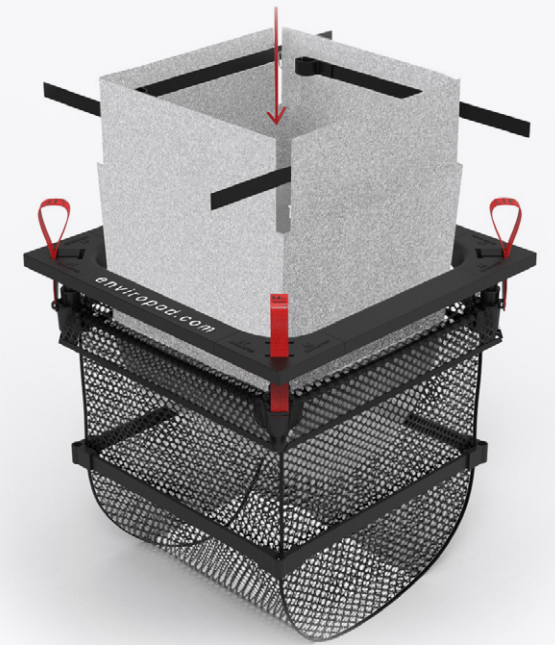

EnviroBasin™ installed with a EnviroPod Geotextile Construction Liner protects the catch basin from construction to completion.

- **One product for two jobs** (Construction and post-construction trash control).
- **Easy maintenance.** The construction liner is supported by the LittaTrap™ basket allowing easy removal and replacement.
- **Hydraulically designed** not to cause flooding.
- **Cost savings.** Construction liners are a low cost addition to your site.
- **Readily available** online and through distributors.



- ✓ High hydraulic capacity
- ✓ Large sediment storage volume
- ✓ Structurally robust
- ✓ Easily maintained




- ✗ Blocks storm drain
- ✗ Can't be maintained
- ✗ Ineffective

## MODEL AND SIZE SPECIFICATION

The EnviroBasin™ has six standard models. Table 1 below details the standard models available.

Model	LittaTrap™ Size	Impervious area for 60% TSS* (m <sup>2</sup> )	Gross Solid Storage (L)	Sediment Storage (m <sup>3</sup> )
Standard	LT6060	950	43	0.32
London Combination	LT6060 with seal kit	1330	43	0.45
Twin	LT6060	2300	43	0.78
Ditch	2x LT6060	950	43	0.32
Junction	LT6060	950	43	0.32
EnviroBasin Air	Catch basin manhole retrofit. Contact EnviroPod for more info.			


\*Estimated using ETV PSD modelled in a specification based on 6 hour 25mm storm depth. Note this is a guide only and site specific design may be required.

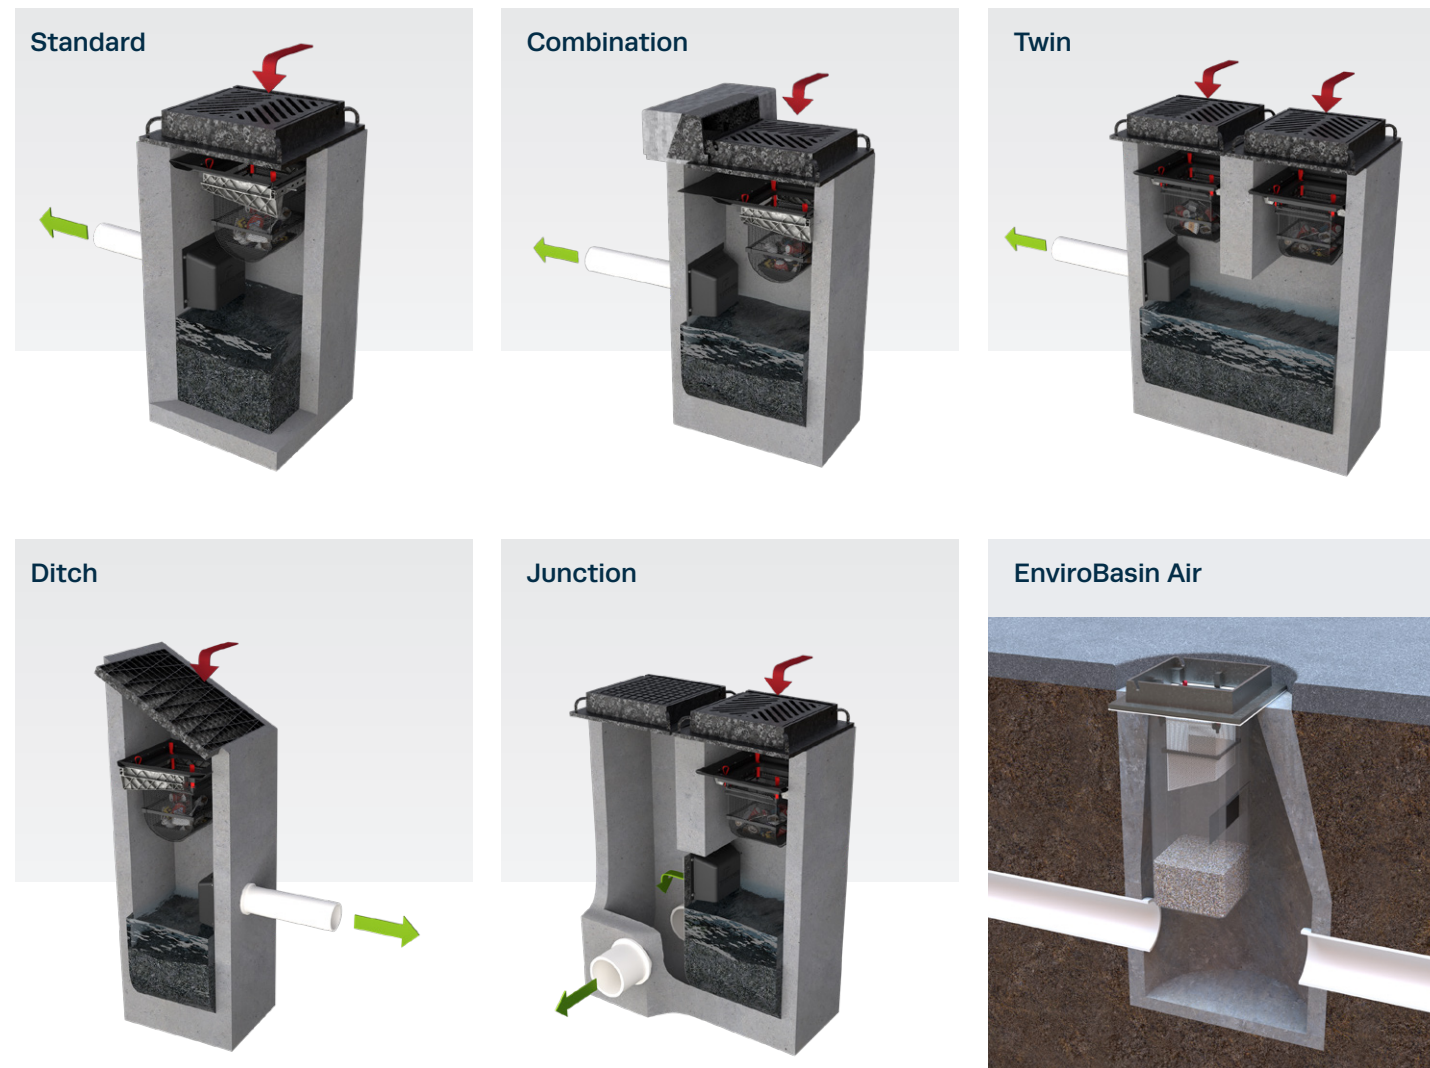

## Applications


### PRE-TREATMENT

**Ideal pre-treatment to infiltration.** As a pre-treatment device or as a stand-alone alternative to a catch basin, the EnviroBasin™ can be used in carpark roads, retail, industrial sites and other high contaminant generating areas.

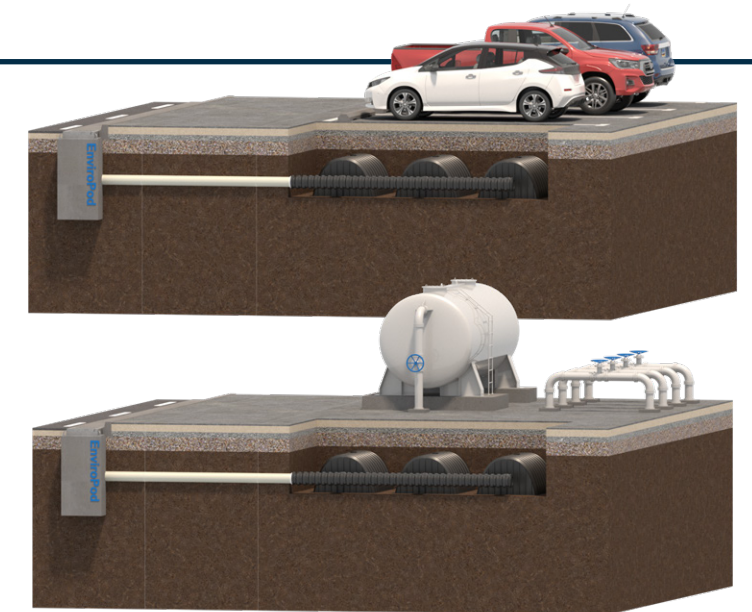

### LOW IMPACT DESIGN

**Ideal for pre-treatment to Low Impact Design or infiltration.** Using EnviroBasin™ allows a distributed entry into these drainage structures.

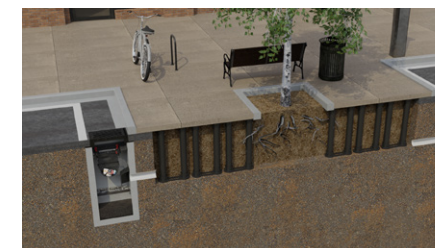

### URBAN COASTAL AREAS

**Ideal for urban coastal areas such as waterfronts, marinas and ports** where catch basins often directly discharge into the ocean or lake.



# What is ETV testing and why does it matter

In Canada and other jurisdictions, regulatory agencies and permitting authorities may have requirements and performance criteria to approve and accept various stormwater treatment devices for specific applications and operating conditions.

Regulatory agencies and authorities can benefit from scientifically defensible, verifiable performance data applicable to different end-use requirements and operating conditions.



The "Procedure for Laboratory Testing of Oil-Grit Separators" was initially prepared in 2013 by TRCA for the Canadian Environmental Technology Verification (ETV) Program and subsequent verification following the International Organization for Standardization ISO requirements 14034:2016 ETV standard, published in November 2016.

The procedure intends to provide a standard procedure for testing and verifying the performance of OGS under controlled conditions independently and transparently. Independent verification of the performance data using the procedure as the basis for testing has assisted Canadian regulatory agencies, permitting authorities and other affected stakeholders in evaluating treatment technology options.

The ETV ISO 14034 testing standard represents a practical approach for testing to produce verifiable performance data on specific technologies under defined operating conditions. The procedure reduces uncertainties and improves the likelihood of market acceptance of the independently generated performance data, contributing to more informed technology decisions.

The EnviroBasin™ has been tested to the Procedure for Laboratory Testing of Oil-Grit Separators and has ETV-verified results.

**Stormwater designers and municipalities can adopt the use of the EnviroBasin™ with confidence knowing it is verified and accepted across Canada.**



# Maintenance

The system is easy to maintain and the EnviroBasin's™ unique enhanced storage sump capacity extends vector truck maintenance requirements to once every two-to-three years.

3-12 months

**Routine maintenance** of LittaTrap™ by hand or vector truck (dependent on site specific loading).

2-3 years

**Periodic maintenance** by vector truck maintenance of the EnviroBasin™ sump (depending on site specific loading).



### LittaTrap™ Basket Hand Maintenance

It is recommended the LittaTrap™ basket be emptied when 75% full (generally every 3-12 months). To empty the basket, simply "Lift, Tip, Reuse". The following steps detail hand maintenance:

1. Establish a safe working area per typical catch basin service activity.
2. Remove grate/access cover.
3. Remove the basket with two lifting hooks or lift by hand through the loops on the top of the basket. Excess debris should be scooped out first if the basket is over half full.
4. Pour contents of the basket into a disposal container.
5. Replace grate.



### EnviroBasin™ Sump Vector Maintenance


Steps for vector maintenance are as detailed below:

1. Establish a safe working area per typical catch pit service activity.
2. Remove grate/access cover.
3. Vacuum accumulated debris from the basket.
4. Vector the contents from the sump of the catch basin (if required).
5. Inspect the LittaTrap™ and EnviroBasin™ for any damage. Reinstall the LittaTrap™ basket.
6. Replace grate/access cover.



# Free Design support & regulatory assistance

EnviroPod offers a free design service where the cumulative performance of several EnviroBasins™ can be modelled for a specific project based on local rainfall and treatment needs. Using local rainfall data and treatment requirements, this service helps stormwater consultants optimize the placement, quantity, and sizing of EnviroBasins™ for maximum efficiency.

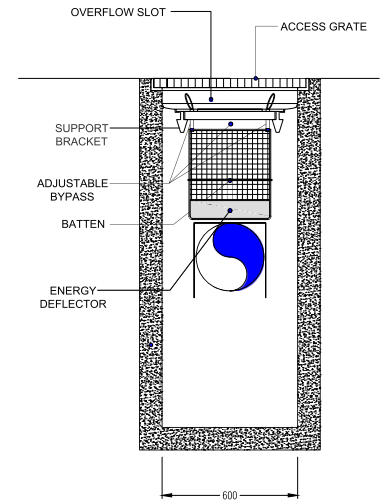

**ENVIROPOD™**  
A STORMWATER360™ COMPANY

**Catchment Treated:**  
Name: E83  
Assessment Method: 12 Hour SCS Rainfall Event  
Storm Depth: 25mm  
Total Catchment Area: 950 m<sup>2</sup>  
C-factor: 0.64

Particle Size (µm)	Percent Less Than	Particle Size (µm)	Percent
1000	5	100-2000	5
500	10	200-500	5
250	30	500-250	15
100	75	100-500	35
50	85	250-100	30
25	90	50-250	25
10	95	10-50	30
5	98	5-10	15
2	99	2-5	10
1	99.5	1-2	5

**EnviroPod-EnviroBasin Annual TSS Removal Rates**

Catchment Parameters	Value	Results	Value
Assessment Method	12 Hour SCS Rainfall Event	Average Flow Rate (L/min)	21.5
Storm Depth used for Event (mm)	25	Average Surface Loading Rate (L/min/m <sup>2</sup> )	0.02
Catchment Area (ha)	0.095	Average Removal Rate (%)	60%
Runoff Coefficient	0.64		

Assumptions and limitations of the tool:  
1. This Storm Depth parameter only applies to the SCS Rainfall Event assessment method.  
2. Assumes the catchment is installed in a standard 600mm x 600mm catch basin.  
3. Assumes an even mass TSS concentration which is consistent with influent concentrations applied during ETR testing.  
4. Assumes a particle size distribution consistent with the distributions used during ETR testing.  
5. Not suitable for catchment areas too large for the National Method to apply.  
6. Does not account for overflow or overflow.  
7. For preliminary assessment purposes only.

Figure 3. Performance Efficiency Calculator output for E83.

The removal rate for E83 was estimated using Historical Rainfall data for GTA Southwest and with the catchment area of 950m<sup>2</sup> and the provided runoff coefficient of 0.64, it is estimated that 60% of TSS will be removed using the Envirobasin. This assumes that a standard 600mm x 600mm diameter Envirobasin is used with a minimum sump depth of 900mm.

EnviroPod Canada, Ltd. 36 Toronto Street, Suite 4050, Toronto, ON M5C 2C5 | www.enviropod.com

Example design calculations and drawings

MODEL AREA (M <sup>2</sup> )	MAX. FLOW STORAGE (LITERS)	MIN. FLOW STORAGE (LITERS)
0.095	100	50

**ENVIROBASIN™ TRASH AND SEDIMENT CAPTURE SPECIFICATION DRAWING**  
ENVIROPOD CANADA



## ABOUT ENVIROPOD

EnviroPod is the world's leading catch basin insert technology provider. The company has over 50,000 installations worldwide, including catchment wide retrofits. The EnviroBasin™ is a result of 26 years' of research, implementation and operation of source treatment solutions.

For further information please see [www.enviropod.com](http://www.enviropod.com)

International patent numbers for: CA – 2,810,974 ; USA – 9,642,658 ; AU – 2011302712 ; NZ – 588049. Other patents pending.

